


SGM-FL-150W(SP series)

High Efficiency Flexible Solar Modules



— Surface ETFE —

Module Diagram

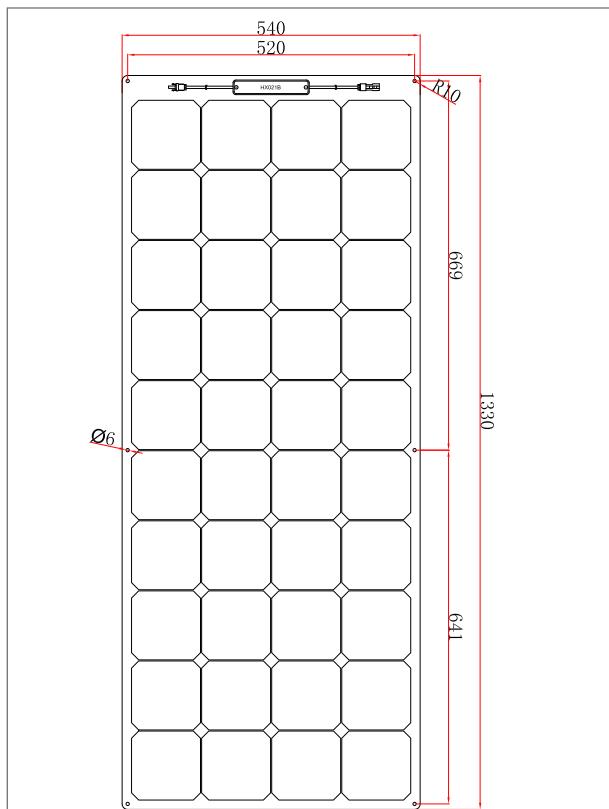

Electrical Characteristics

| | |
|---------------------------------|------------|
| Maximum power(Pmax) | 150W |
| Open-circuit voltage(Voc) | 29.2 |
| Voltage at Pmax(Vmp) | 24.8 |
| Short-circuit current(Isc) | 6.41 |
| Current at Pmax(ImP) | 6.05 |
| Cells Efficiency(%) | 24.40% |
| The maximum system voltage | 45VDC(IEC) |
| Power temperature coefficient | -0.32%/°C |
| Voltage temperature coefficient | -1.8mv/°C |
| Output power tolerance | ±3% |
| Operating Temperature | -10~60°C |

Specifications

| | |
|-----------------------------|----------------------------------|
| Solar cell brand | Sunpower |
| No.of cells and connections | 40(4*10) |
| Module dimension | 1330*540*3mm |
| Weight | 2.63KG |
| Waterproof junction box | IP65 /IP67 |
| Warranty | 1 year and service life 10 years |

SP-150W (Also suitable for this model)

Shenzhen Sungold Solar Co.,Ltd
Tel:86-(0)-755-29685821
Fax:86-(0)755-29685820